


# Hydraulic Hose - 2M SAE 100R2AT

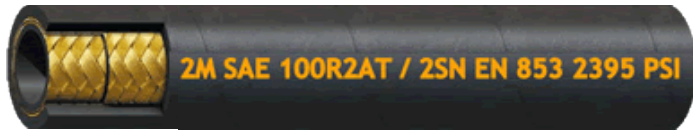

- Application:** For medium-high pressure hydraulic systems in industry and agriculture.
- Tube:** Synthetic rubber, resistant against hydraulic fluids
- Reinforcement:** Two braids of high tensile steel wire
- Cover:** Abrasion and ozone resistant synthetic rubber. Note: various covers available. MSHA approved. Blue cover available.
- Temperature:** -40 °C to 100 °C (max 120 °C intermittent)

Part Number	Dimensions (in)		Pressure (psi)		Bend Radius	Weight
	ID	OD	Working	Burst	in	lbs/ft
AGB-AJJD-EHJJ9	1/4	0.57	5800	23200	3.93	0.21
AGB-AJJF-DHJJ9	3/8	0.72	4800	19200	5.11	0.30
AGB-AJJH-DJJJ9	1/2	0.84	4000	16000	7.08	0.36
AGB-AJAJ-CFBE9	5/8	0.97	3625	15000	7.87	0.44
AGB-AJAB-CABJ9	3/4	1.13	3120	12480	9.44	0.56
AGB-AJAF-BDJJ9	1	1.46	2400	9600	11.81	0.83
AGB-AJBJ-AHAE9	1 1/4	1.86	1815	7260	16.53	1.19
AGB-AJBD-ACJE9	1 1/2	2.11	1305	5220	19.68	1.46
AGB-AJCB-AAFJ9	2	2.63	1160	4640	24.80	1.88